NEW, USED, AND REFURBISHED PUMPS AND PARTS




GASO DUPLEX, GASO TRIPLEX AND GASO QUINTUPLEX PLUNGER AND PISTON PUMPS BY WHEATLEY AND GASO PUMP

Wheatley, T225-M (32T-2M), Triplex, Plunger Pump

- 32 horsepower 2 1/4" stroke horizontal triplex single acting plunger pump
- Available in four different fluid end materials
- Pump speeds up to 465 RPM

Specs

Spec	U.S. Standard	
• Туре:	triplex	
Minimum Plunger Diameter:	11/8"	N
Maximum Plunger Diameter:	13⁄4"	
Stroke length:	21/4"	et::::
Maximum Working Pressure:	2,565 PSI	
Rod/Piston Load:	2550lb	Tur
Gallons per Minute:	32.7	
Barrels per Day:	1121	11
Brake Horse Power:	32.0	-4



Features/Benefits


Power End Features:

- Cast iron power frame
- Heavy-duty roller crankshaft bearings
- Precision type, aluminum alloy crankpin bearings
- Cast iron connecting rods
- Alloy steel crosshead pins
- Alloy steel crankshaft with ground journals and polished throws
- Bronze bearing crosshead pin bushings
- Cast iron crossheads with upper/lower oil grooves
- One piece plungers
- Flooded sump, splash distribution lubrication
- Rated rod load is 3600 lbs

Fluid End Features:

- Threaded type glands and integral stuffing boxes
- Plungers Ceramic or Tungsten Carbide coated

IEQ Industries Ltd PO Box 230097 Grand Rapids, MI 49523 Phone: 800.544.9053 | 616.452.6882 Fax: 888.796.2653

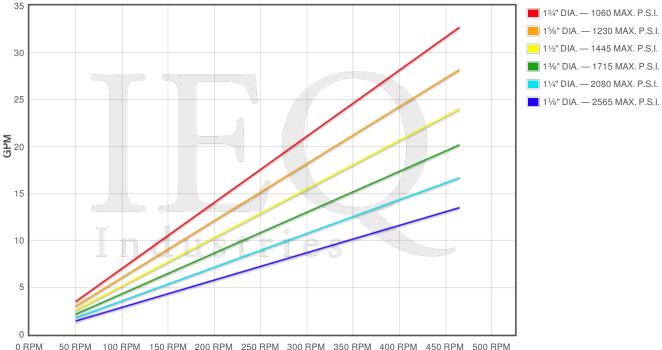

 0 RPM
 50 RPM
 100 RPM
 150 RPM
 200 RPM
 250 RPM
 300 RPM
 350 RPM
 400 RPM
 450 RPM
 500 RPM

 0.0 HP
 2.4 HP
 4.8 HP
 7.2 HP
 9.7 HP
 12.1 HP
 14.5 HP
 16.9 HP
 19.3 HP
 21.7 HP
 24.1 HP

Pump	English Units				50 RPM		200 RPM		350 RPM		465 RPM		
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
	1.750	2.4053	2.410	0.0703	1060	120.5	3.514	481.9	14.06	843.4	24.6	1121	32.68
Toor	1.625	2.0739	2.078	0.0606	1230	103.9	3.03	415.6	12.12	727.2	21.21	966.2	28.18
T225- M	1.500	1.7671		0.0516	1443	88.52	2.582	354.1	10.33	619.6	18.07	823.2	24.01
32T- 2M	1.375	1.4849	1.488	0.0434	1717	74.38	2.169	297.5	8.678	520.7	15.19	691.8	20.18
∠IVI	1.250	1.2272	1.229	0.0359	2078	61.47	1.793	245.9	7.172	430.3	12.55	571.7	16.67
	1.125	0.9940	0.996	0.0290	2565	49.79	1.452	199.2	5.809	348.6	10.17	463.1	13.51

Disclaimer I

This website is intended as a reference tool only. It has been constructed from published data that is based on manufacturer's sales and engineering documents that are either current, historical and obsolete. Much of the machinery data contained herein has been re-rated through the years with different engineering criteria which maybe in conflict with legacy data. Much of the content published here is calculated online with the use of dynamic data using formulas and extrapolations considered to be sound engineering formulas and are correct to the degree that the data used is accurate. We have done our best to be as precise as as possible in this posting but do not represent any of the calculations or performance data to be entirely accurate. The data published here is intended to be general information rather than actual and to serve as a reference rather than a technical absolute. The user of such data should confirm such information independently.

Copyright and Disclaimers

Wheatley/GASO plunger and piston pumps, Gaso pump parts and a supplier of ORIGINAL GASO PARTS and equipment, new used and remanufactured Wheatley, GASO and Wheatley/GASO plunger and piston pumps and pump parts and is not affiliated with Wheatley/GASO Inc. or its parent company, National Oilwell Varco, Copyright ©2015, IEQ Industries LTD. All rights reserved, *Used under license from Intellectual Property Management Services, LLC