NEW, USED, AND REFURBISHED PUMPS AND PARTS




GASO DUPLEX, GASO TRIPLEX AND GASO QUINTUPLEX PLUNGER AND PISTON PUMPS BY WHEATLEY AND GASO PUMP

Wheatley, T365-AM (59T-3M), Triplex, Plunger Pump

- 59 horsepower 3 1/2" stroke horizontal triplex single acting plunger pump
- Available in four different fluid end materials
- Pump speeds up to 420 RPM
- Multiple accessory gear reduction unit ratios

Specs


Spec	U.S. Standard					
Туре:	triplex					
Minimum Plunger Diameter:	15%"					
Maximum Plunger Diameter:	21/2"					
Stroke length:	31/2"					
Maximum Working Pressure:	2,295 PSI					
Rod/Piston Load:	4760lb					
Gallons per Minute:	93.71					
Barrels per Day:	3213					
Brake Horse Power:	59.0					



Features/Benefits

- Cast iron power frame
- Ductile Iron Crankshaft
- Heavy-duty roller crankshaft bearings
- Bi-Metal crankpin bearings
- Alloy steel crosshead pins
- Bronze bearing crosshead pin bushings
- · Cast iron crossheads with upper/lower oil grooves

IEQ Industries Ltd PO Box 230097 Grand Rapids, MI 49523 Phone: 800.544.9053 | 616.452.6882 Fax: 888.796.2653

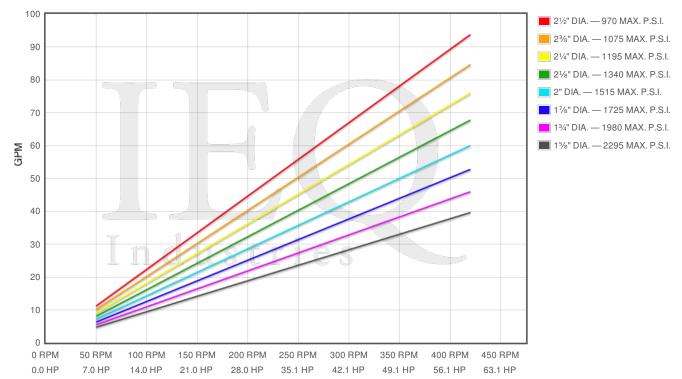

Pump	English Units				50 RPM		150 RPM		250 RPM		350 RPM		420 RPM		
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM
T365- AM 59T- 3M	2.500	4.9087	7.650	0.2231	970	382.5	11.16	1147	33.47	1912	55.78	2677	78.09	3213	93.71
	2.375	4.4301	6.904	0.2014	1074	345.2	10.07	1036	30.21	1726	50.34	2416	70.48	2900	84.58
	2.250	3.9761	6.196	0.1807	1197	309.8	9.037	929.5	27.11	1549	45.18	2169	63.26	2603	75.91
	2.125	3.5466	5.527	0.1612	1342	276.4	8.06	829.1	24.18	1382	40.3	1934	56.42	2321	67.71
	2.000	3.1416	4.896	0.1428	1515	244.8	7.14	734.4	21.42	1224	35.7	1714	49.98	2056	59.98
	1.875	2.7612	4.303	0.1255	1724	215.2	6.275	645.5	18.83	1076	31.38	1506	43.93	1807	52.71
	1.750	2.4053	3.748	0.1093	1979	187.4	5.467	562.3	16.4	937.1	27.33	1312	38.27	1574	45.92
	1.625	2.0739	3.232	0.0943	2295	161.6	4.714	484.8	14.14	808.0	23.57	1131	32.99	1357	39.59

Disclaimer I

This website is intended as a reference tool only. It has been constructed from published data that is based on manufacturer's sales and engineering documents that are either current, historical and obsolete. Much of the machinery data contained herein has been re-rated through the years with different engineering criteria which maybe in conflict with legacy data. Much of the content published here is calculated online with the use of dynamic data using formulas and extrapolations considered to be sound engineering formulas and are correct to the degree that the data used is accurate. We have done our best to be as precise as as possible in this posting but do not represent any of the calculations or performance data to be entirely accurate. The data published here is intended to be general information rather than actual and to serve as a reference rather than a technical absolute. The user of such data should confirm such information independently.

Copyright and Disclaimers

WheatleyGaso.com is your resource for Gaso pumps, Gaso pump parts and a supplier of ORIGINAL GASO PARTS and equipment, new used and remanufactured Wheatley, GASO and Wheatley/GASO plunger and piston pumps and pump parts and is not affiliated with Wheatley/GASO Inc. or its parent company, National Oilwell Varco, Copyright ©2015, IEQ Industries LTD. All rights reserved, *Used under license from Intellectual Property Management Services, LLC