NEW, USED, AND REFURBISHED PUMPS AND PARTS

WHEATLEYGASO.COM

GASO DUPLEX, GASO TRIPLEX AND GASO QUINTUPLEX PLUNGER AND PISTON PUMPS BY WHEATLEY AND GASO PUMP

IEQ Industries Ltd

PO Box 230097 Grand Rapids, MI 49523

Phone: 800.544.9053 | 616.452.6882


Fax: 888.796.2653

Wheatley, T225-LS (22T-2L), Triplex, Plunger Pump

- 22 horsepower 2 1/4" stroke horizontal duplex single acting plunger pump
- · Available in four different fluid end materials
- Pump speeds up to 465 RPM

Specs

Spec U.S. Standard Type: triplex Minimum Plunger Diameter: 11/2" Maximum Plunger Diameter: 2" Stroke length: Maximum Working Pressure: 1,443 PSI Rod/Piston Load: 2550lb Gallons per Minute: 42.7 Barrels per Day: 1464 Brake Horse Power: 22.0




Features/Benefits

Power End Features

- Cast iron power frame
- Flooded sump, splash distribution lubrication
- One piece plungers
- Flooded sump, splash distribution lubrication
- Cast iron connecting rods
- Alloy steel crosshead pins
- Bronze bearing crosshead pin bushings
- · Rated rod load is 2550 lbs.

Fluid End Features

- Threaded type glands and integral stuffing boxes
- Plungers Solid Ceramic, or Tungsten Coated
- Threaded suction and discharge connections

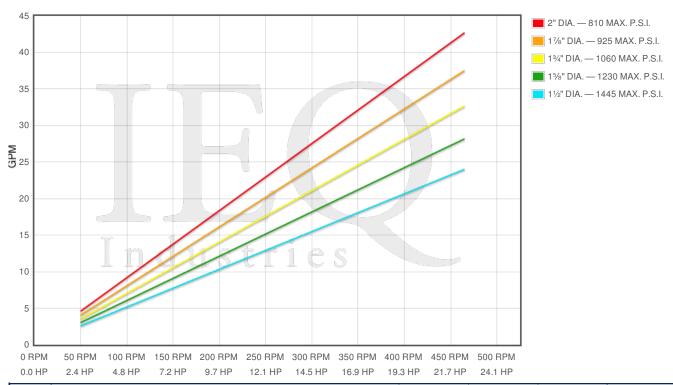

Pump	English Units					50 RPM		200 RPM		350 RPM		465 RPM	
	Plunger Dia. In.	Plunger Area Sq. In.	BPD per RPM	GPM per RPM	Max Press. PSI	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GРM
T225- LS 22T-2L	2.000	3.1416	3.147	0.0918	812	157.4	4.59	629.5	18.36	1102	32.13	1464	42.69
	1.875	2.7612	2.766	0.0807	924	138.3	4.034	553.3	16.14	968.2	28.24	1286	37.52
	1.750	2.4053	2.410	0.0703	1060	120.5	3.514	481.9	14.06	843.4	24.6	1121	32.68
	1.625	2.0739	2.078	0.0606	1230	103.9	3.03	415.6	12.12	727.2	21.21	966.2	28.18
	1.500	1.7671	1.770	0.0516	1443	88.52	2.582	354.1	10.33	619.6	18.07	823.2	24.01

Disclaimer I

This website is intended as a reference tool only. It has been constructed from published data that is based on manufacturer's sales and engineering documents that are either current, historical and obsolete. Much of the machinery data contained herein has been re-rated through the years with different engineering criteria which maybe in conflict with legacy data. Much of the content published here is calculated online with the use of dynamic data using formulas and extrapolations considered to be sound engineering formulas and are correct to the degree that the data used is accurate. We have done our best to be as precise as as possible in this posting but do not represent any of the calculations or performance data to be entirely accurate. The data published here is intended to be general information rather than actual and to serve as a reference rather than a technical absolute. The user of such data should confirm such information independently.

Copyright and Disclaimers

Wheatley/Gaso.com is your resource for Gaso pumps, Gaso pump parts and a supplier of ORIGINAL GASO PARTS and equipment, new used and remanufactured Wheatley, GASO and Wheatley/GASO plunger and piston pumps and pump parts and is not affiliated with Wheatley/GASO Inc. or its parent company, National Oilwell Varco, Copyright ©2015, IEQ Industries LTD. All rights reserved, "Used under license from Intellectual Property Management Services, LLC